

Системы обратной связи для серводвигателей Sendix S36, S3674, S3684

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kgu@nt-rt.ru || сайт: <https://kubler.nt-rt.ru/>

Motor Feedback Systems for servo motors

Compact Motor-Line, optical / magnetic	Sendix S3674 (singleturn) / S3684 (multiturn)	RS485 + SinCos / BiSS + SinCos
---	--	---------------------------------------




The Sendix S36 encoder with optical singleturn and magnetic multiturn gear stands out with its combination of robustness and variants diversity with compact dimensions.

With a size of 36.5 x 37 mm, it features a tapered shaft or an 8 mm hub shaft. Its highly accurate optical electronics achieve a resolution of max. 24 bits. The incremental SinCos interface is available with max. 2048 ppr.



RS485



Temperature range



Shock / vibration resistant



Safety-Lock™



High shaft load capacity



SinCos



Short-circuit proof



Reverse polarity protection

Reliable and insensitive

- Robust construction for optimal functionality in the servo motor.
- Wide temperature range of -40 °C ... +120 °C – designed specially for operation in servo motors.
- Special connector concept for fast and easy commissioning.

Performance-optimized

- Standard RS485 interface (Hiperface®¹⁾ compatible) + SinCos for use in many standard servo motors.
- Highest performance thanks to max. 24-bit singleturn resolution and 1024 or 2048 ppr SinCos.
- Mechanically suitable for mounting on standard servo motors.

Order code

8.S36	X4	.XXX1	.XXXX
Type	a	b c d e	f g h

a Version

- 7 = singleturn**
8 = multiturn (12 bits)

b Flange

- 1 = with stator coupling, ø 38 mm [1.50"]**
4 = with stator coupling, ø 60 mm [2.36"]
5 = with stator coupling, ø 55 mm [2.17"]

c Shaft

- 1 = hub shaft, ø 8 mm [0.32"]**
2 = tapered shaft, ø 8 mm [0.32"]
3 = hub shaft cone, ø 9 mm [0.35"]

d Supply voltage

- 1 = 7 ... 30 V DC**
2 = 5 V DC

e Type of connection

- 1 = PCB connector radial**

f Digital interface

- 1 = BiSS**
2 = RS485 (Hiperface®¹⁾ compatibel)

g Incremental interface

- A = none**
1 = 1024 ppr SinCos
2 = 2048 ppr SinCos

h Resolution singleturn

- 12 = 12 bits**
15 = 15 bits
16 = 16 bits
17 = 17 bits
19 = 19 bits
20 = 20 bit
21 = 21 bit²⁾
23 = 23 bit²⁾
24 = 24 bit^{2) 3)}

*Optional on request
- other stator coupling*

1) Hiperface® is a registered trademark of Sick Stegmann GmbH.

2) With digital interface **f** = 2 only available in singleturn version (**a** = 7), as RS485 is limited to max. 32 bits.

3) In combination with incremental interface only available with 2048 ppr.

Motor Feedback Systems for servo motors

Compact Motor-Line, optical / magnetic	Sendix S3674 (singleturn) / S3684 (multiturn)	RS485 + SinCos / BiSS + SinCos
--	---	--------------------------------

Connection technology	Order no.	
Cordsets, pre-assembled	for BiSS + SinCos	Cordset, 10-core PCB connector (female contacts) + single-ended 0.5 m single wires 8.0000.D111.0M50
	for RS485 + SinCos	Cordset, 8-core PCB connector (female contacts) + single-ended 0.5 m single wires 8.0000.D112.0M50
	for BiSS fully digital	Cordset, 6-core PCB connector (female contacts) + single-ended 0.5 m single wires 8.0000.D113.0M50

Technical data

Mechanical characteristics		
Maximum speed	12000 min ⁻¹ (short-term) 9000 min ⁻¹ (continuous)	
Starting torque at 20 °C [68 °F]	< 0.004 Nm	
Load capacity of shaft	radial	40 N
	axial	20 N
Weight	approx. 0.1 kg [35.27 oz]	
Protection acc. to EN 60529	IP40	
Working temperature range	-40 °C ... +120 °C [-40 °F ... +248 °F]	
Materials	shaft	stainless steel
	flange	aluminum
	housing	zinc die-cast
Shock resistance acc. EN 60068-2-27	1000 m/s ² , 6 ms	
Vibration resistance acc. EN 60068-2-6	500 m/s ² , 10 ... 2000 Hz	

Electrical characteristics		
Supply voltage	7 ... 30 V DC	5 V DC
Current consumption (no load)	max. 90 mA	max. 150 mA
Reverse polarity protection of the supply voltage	yes	
Short circuit proof outputs	yes ²⁾	
Absolute accuracy	±45 arcseconds ³⁾	
Repetition accuracy	±7 arcseconds ³⁾	

BiSS interface		
Output driver	RS485 transceiver type	
Permissible load / channel	max. +/- 30 mA	
Signal level	HIGH	min. 2.4 V
	LOW at I _{Last} = 20 mA	max. 0.4 V
Resolution singleturn	12 ... 19 bit	
Number of revolutions (multiturn)	12 bit	
Code	binary	
Clock rate BiSS	50 kHz ... 10 MHz	
Max. update rate	< 10 µs, depends on the clock rate and the data length	

RS485 interface (Hiperface® ¹⁾ compatible		
Output driver	RS485 transceiver type	
Permissible load / channel	max. +/- 30 mA	
Signal level	HIGH	min. 2.4 V
	LOW at I _{Last} = 20 mA	max. 0.4 V
Resolution singleturn	12 ... 24 bit	
Number of revolutions (multiturn)	12 bit	
Code	binary	

Incremental outputs SinCos (A/B)	
Max. frequency -3dB	400 kHz
Signal level	1 V _{pp} (± 20%)
Short circuit proof	yes ²⁾
Pulse rate	1024 ppr / 2048 ppr

Approvals		
CE compliant in accordance with	EMC Directive	2014/30/EU
	RoHS Directive	2011/65/EU

1) Hiperface® is a registered trademark of Sick Stegmann GmbH.

2) Short circuit proof to 0 V or to output when supply voltage correctly applied.

3) Error limits for evaluation of SinCos signals (with relaxed torque stop).

Motor Feedback Systems for servo motors

Compact Motor-Line, optical / magnetic

Sendix S3674 (singleturn) / S3684 (multiturn)

RS485 + SinCos / BiSS + SinCos

Terminal assignment

Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
1 (BiSS)	1 (SinCos)	1	Signal:	0 V	+V	D+	D-	C+	C-	A	$\bar{A}$	B	$\bar{B}$
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 10-core (8.0000.D111.0M50)			Core color:	BU	RD	GY	GN	YE	VT	PK	BK	WH	BN


Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
2 (RS485)	1 (SinCos)	1	Signal:	0 V	+V	D+	D-	–	–	A	$\bar{A}$	B	$\bar{B}$
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 8-core (8.0000.D112.0M50)			Core color:	BU	RD	GY	GN	–	–	PK	BK	WH	BN

Digital interface	Incremental interface	Type of connection	PCB connector (male contact), 10-pin										
1 (BiSS)	A (without)	1	Signal:	0 V	+V	D+	D-	C+	C-	–	–	–	–
			Pin:	1	2	3	4	5	6	7	8	9	10
suitable pre-assembled cordset, 6-core (8.0000.D113.0M50)			Core color:	BU	RD	GY	GN	YE	VT	–	–	–	–

+V: Supply voltage encoder +V DC
 0 V: Supply voltage encoder ground GND (0 V)
 D+, D-: Data signal
 C+, C-: Clock signal
 A, $\bar{A}$: Incremental output channel A (cosine)
 B, $\bar{B}$: Incremental output channel B (sine)

Top view of mating side, male contact base

Type of connection 1
 Molex IllumiMate™ (male contact)
 single row, 10-pin (104091-1020)




RS485 + SinCos / BiSS + SinCos



Dimensions in mm [inch]

(with PCB connector)



- 1 Recommended torque for central screw (SW 2.5) typ. 1 Nm (tapered shaft)
- 2 Pitch circle diameter
- 3 Envelope circle diameter

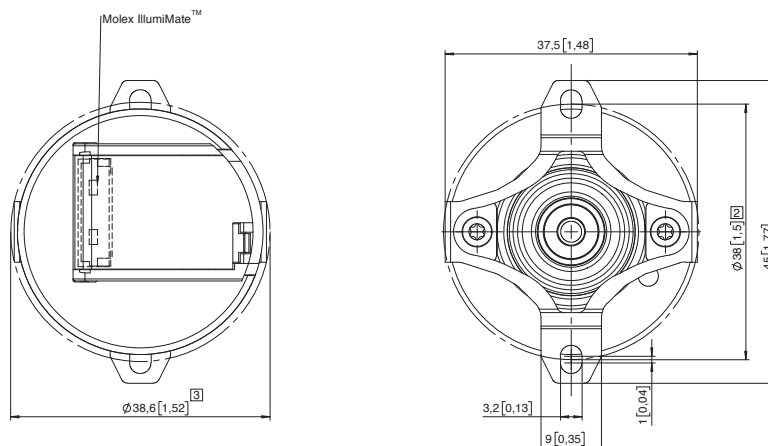

Mounting suggestion

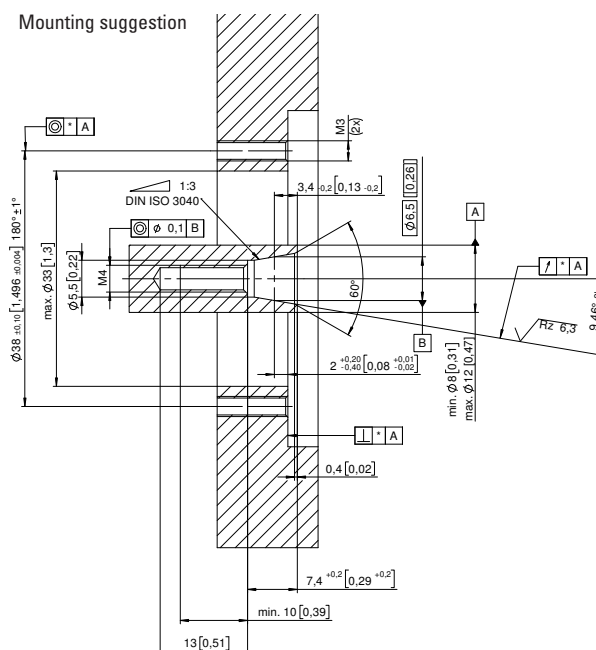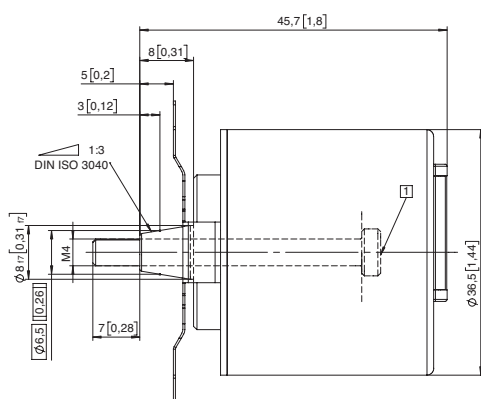

Mounting suggestion

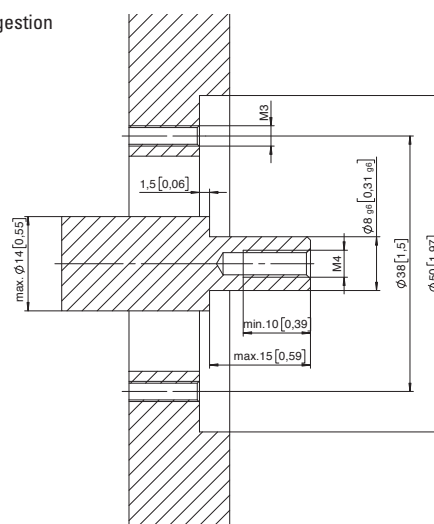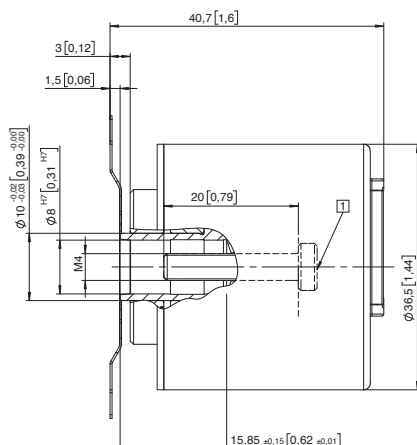

* The tolerance size reduces the permissible shaft movement (see technical data).
General tolerances according to DIN ISO 2768-mk.

Motor Feedback Systems for servo motors

Compact Motor-Line, optical / magnetic

Sendix S3674 (singleturn) / S3684 (multiturn)

RS485 + SinCos / BiSS + SinCos

Dimensions

Dimensions in mm [inch]

Flange with stator coupling, $\varnothing$ 60 [2.36]

Flange type 4

(with PCB connector)



- 1 Recommended torque for central screw (SW 2.5) typ. 1 Nm (tapered shaft)
- 2 Pitch circle diameter
- 3 Envelope circle diameter

Note:


We recommend hexagon socket head screws for fastening the stator coupling.

The hexagon keys to be used must comply with DIN ISO 2936 L (index L = long version) with ball head.


The ball head makes access easier, in particular for hardly accessible screws, and allows working up to an angle of 25°.

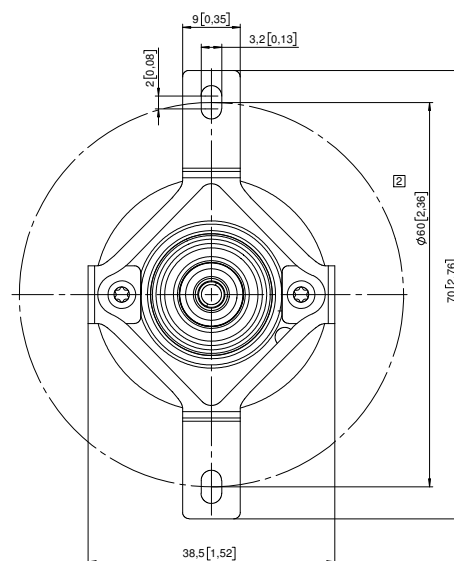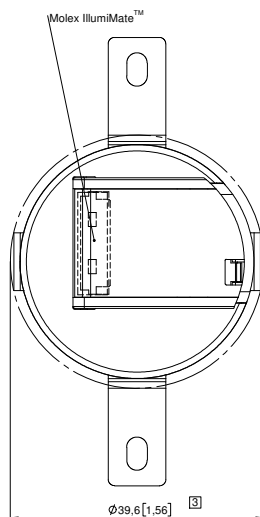


With tapered shaft 2

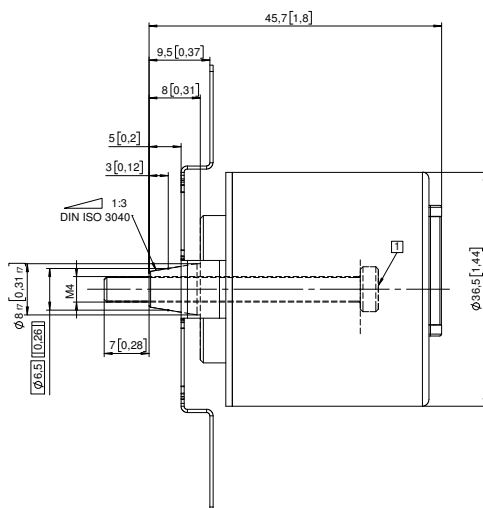


Mounting suggestion

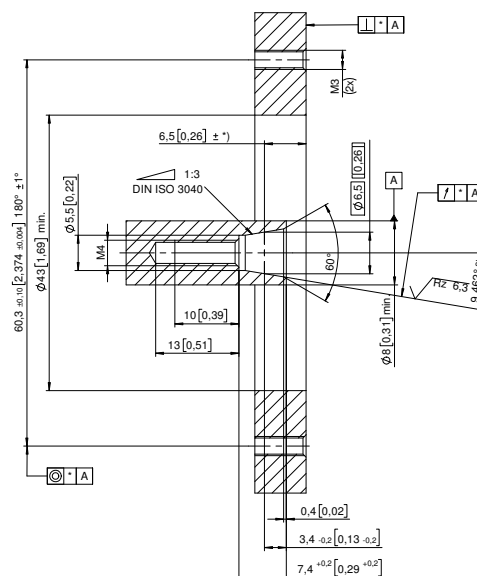

With hub shaft 1

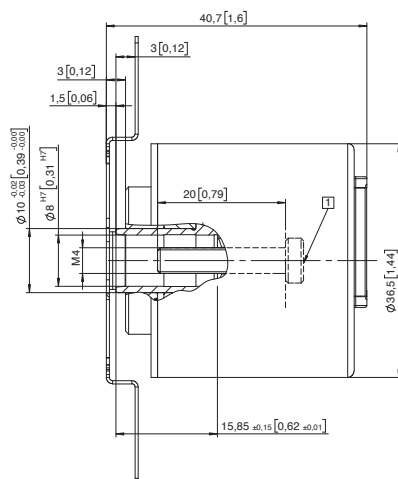

Mounting suggestion

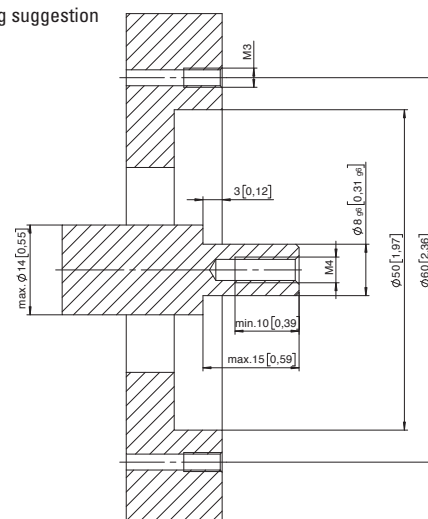

* The tolerance size reduces the permissible shaft movement (see technical data).
General tolerances according to DIN ISO 2768-mk.

Motor Feedback Systems for servo motors

Compact Motor-Line, optical / magnetic

Sendix S3674 (singleturn) / S3684 (multiturn)

RS485 + SinCos / BiSS + SinCos

Dimensions

Dimensions in mm [inch]




Flange with stator coupling, ø 55 [2.17] Flange type 5

With hub shaft cone 3 (with PCB connector)


- 1 Recommended torque for central screw (SW 2.5) typ. 1 Nm (tapered shaft)
- 2 Pitch circle diameter
- 3 Envelope circle diameter

Note:

We recommend hexagon socket head screws for fastening the stator coupling.
The hexagon keys to be used must comply with DIN ISO 2936 L (index L = long version) with ball head.
The ball head makes access easier, in particular for hardly accessible screws, and allows working up to an angle of 25°.

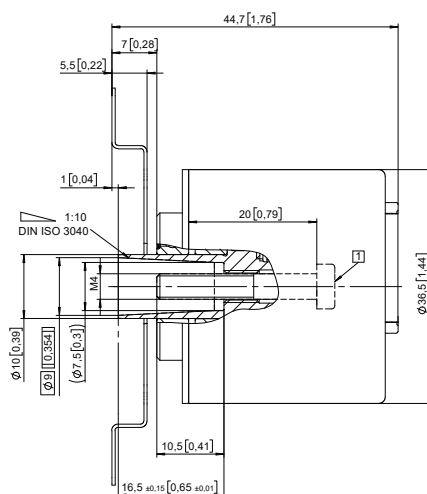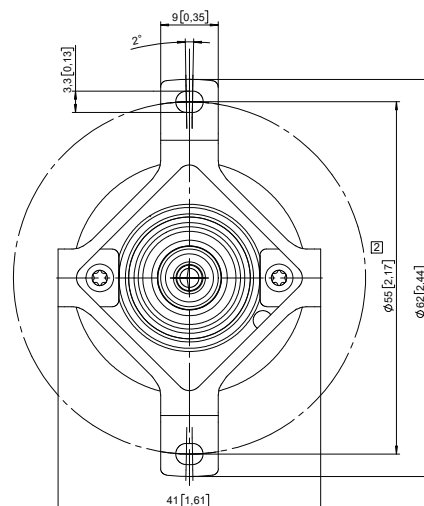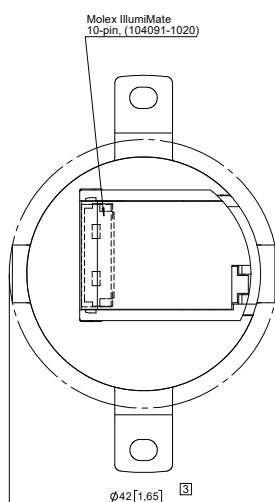

Mounting suggestion

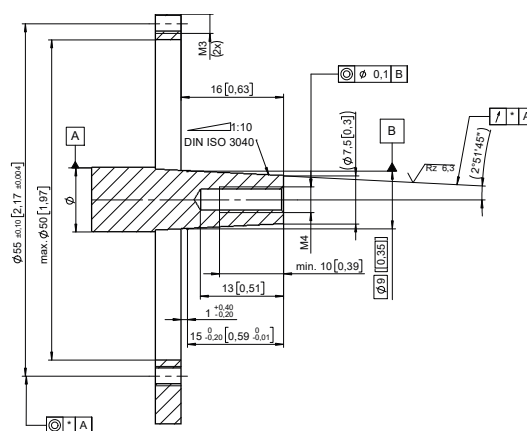

* The tolerance size reduces the permissible shaft movement (see technical data).
General tolerances according to DIN ISO 2768-mk.



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kgu@nt-rt.ru || сайт: <https://kubler.nt-rt.ru/>